



LED BAR PRO

Operating Manual

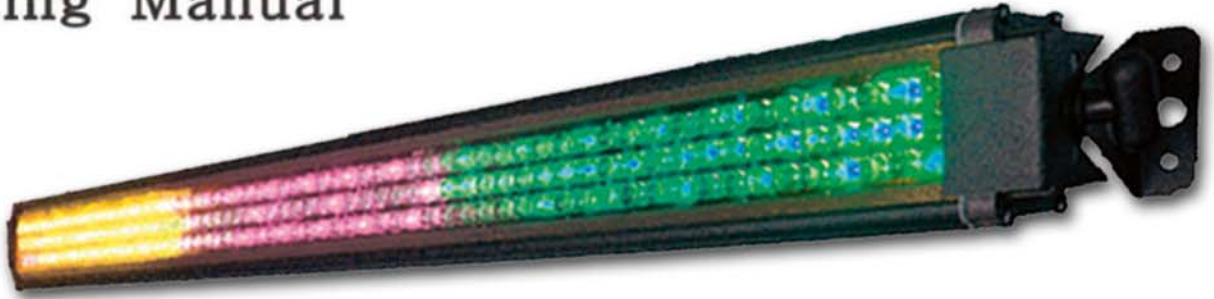

- To enter the menu press "Menu" key one time. Use keys "▲ Up" and "▼ Down" to move within the menu. Use key "Enter" to select the function and to recall the next menu section. To escape press key "Menu".

■ Menu navigation

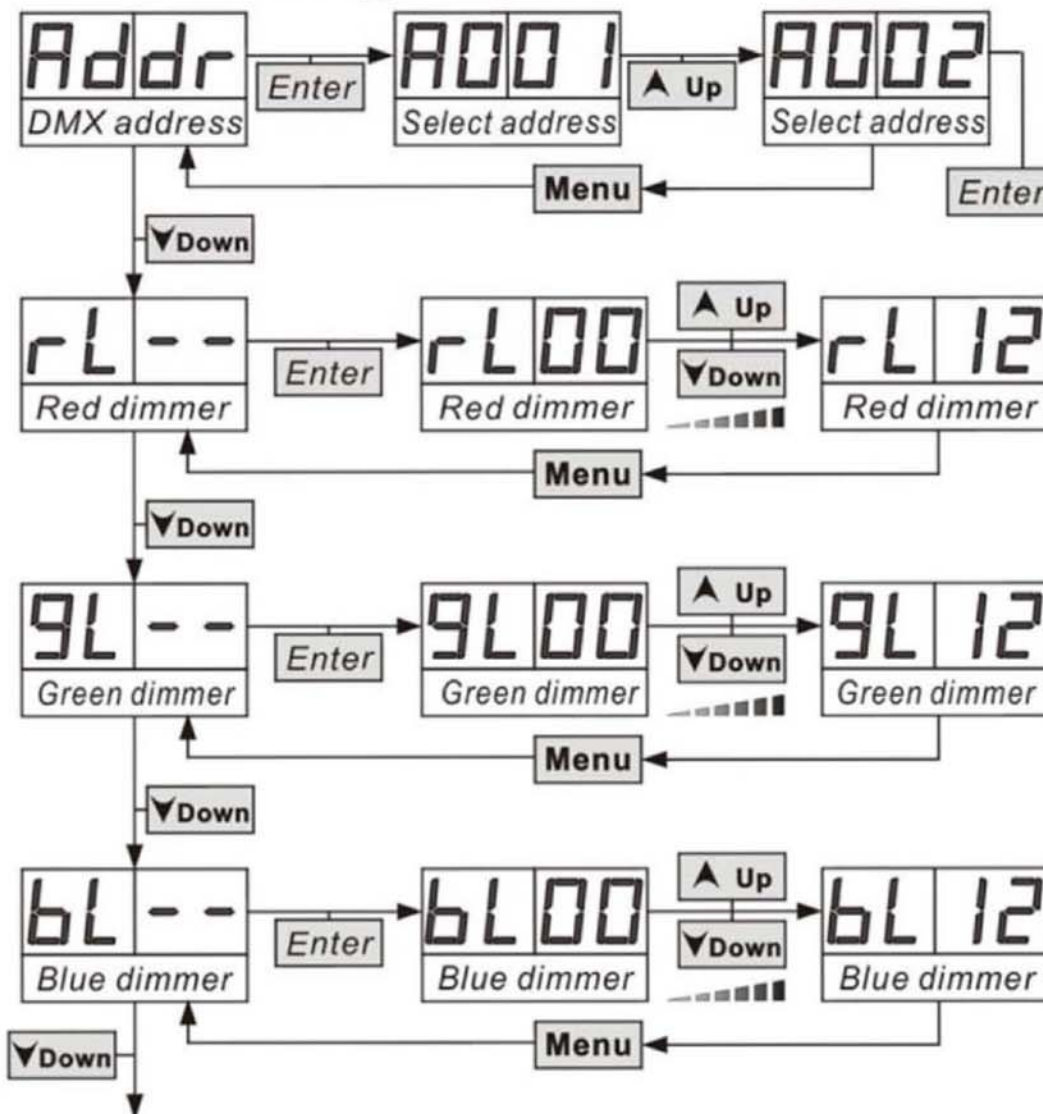

FLAS
Flash

Enter

FL00
Speed1

▲ Up
▼ Down
▬▬▬▬▬

FL 12
Speed12

Menu

▼ Down

FADE
Fade in and fade out

Enter

FA00
Speed1

▲ Up
▼ Down
▬▬▬▬▬

FA 12
Speed12

Menu

▼ Down

ASC-
Change 7 color

Enter

AS00
Speed1

▲ Up
▼ Down
▬▬▬▬▬

AS 12
Speed12

Menu

▼ Down

CE--
Chase

Enter

CE00
Chase1

▲ Up
▼ Down

CE 12
Chase1-12

Menu

▼ Down

CS--
Chase Speed

Enter

CS00
Chase Speed1

▲ Up
▼ Down
▬▬▬▬▬

CS 12
Chase Speed12

Menu

▼ Down

SQUA
Sound Chase

Enter

SQUA
Sound Chase

Menu

▼ Down

SQUF
Sound Flash

Enter

SQUF
Sound Flash

Menu



Function:

■ Manual mode

1	RL 12	Red dimmer
2	GL 12	Green dimmer
3	BL 12	Blue dimmer

■ Auto mode

1	FL 12	Flash
2	FA 12	Automatic fade in and fade out
3	AS 12	Auto change 7 color
4	CE 12	Chase lights
5	CS 12	Chase lights speed

■ Sound control mode

1	SQUA	Sound Chase lights
2	SQUF	Sound 7 color flash

■ Synchronization mode(master and slave)

1	Master light	Choose same as (manual ,auto, sound control) mode way
2	All slave lights	A00 1P00 1F00 1

■ DMX 512 mode

DMX Addressing:

Enter DMX address by means of the keys "▲ Up" and "▼Down",
Confirm a store by pressing key "Enter".

DMX channel allocation:

Channel 1: 0-3 light OFF

4-9 light ON

10-39 strobe

40-69 fade in and fade out

70-99 auto 7 color change

100-110 chase1 , 111-121 chase2 , 122-132 chase3,

133-143 chase4 , 144-154 chase5 , 155-165 chase6,

166-176 chase7 , 177-187 chase8 , 188-198 chase9,

199-209 chase10 , 210-220 chase11 , 221-231 chase12,

232-244 chase1-chase12

245-250 sound chase, 251-255 sound strobe

Channel 2: R G B dimmer

Channel 3: R dimmer

Channel 4: G dimmer

Channel 5: B dimmer

Channel 6: R dimmer

Channel 7: G dimmer

Channel 8: B dimmer

Channel 9: R dimmer

Channel 10: G dimmer

Channel 11: B dimmer

Specifications:

1) Technical Specifications:

Color change:	16.7 million colours(24bit)
Source:	252 10mm (84 red, 84 green, 84 blue)
LED diameter:	10mm
Beam angle:	35 degree(+5degree)
Data connector:	XLR-3
Data interface:	DMX512
Control system:	DMX512 controller
Control mode:	Auto / sound-activated / DMX512 / Master & Slave
Channels:	11channels
Lifetime:	60-100 thousand hours
projecting Distance:	20meters
Lighting dimension:	8.5x6.5x107cm
Net weight:	3kgs
Master packed:	6pcs
Shipping size:	110x26x40cm
Shipping weight:	20kgs

2) Electrical Specifications:

Voltage:	90-250V/50-60Hz
Rated power:	18.8W

3) Environmental Specifications:

Temperature:	-20°C - 45°C
Humidity:	0%—90% / for indoor use